

Cable Kit 3250 Interface 3130 or 3009/09

Mimer SoftRadio for Sepura SRM/SRG radios

Remote functionality

This cable kit will together with the Mimer Network give remote control of the radios audio and PTT functions. No virtual control head is possible.

Radio programming

It is smart to set a fixed volume level out of the radio. There are some tips later in this guide.

Apart from that no special programming is needed in the radio.


Radio connection

The cable kit shall be connected at the back of the radios control head or alternatively in an AIU box, in the port for external microphone/handset.

The black connector goes to the radios power connector and powers both the radio and the interface. The standard power cable kit is not used.

Power

The red and black wires shall be connected to 12VDC, red is positive.

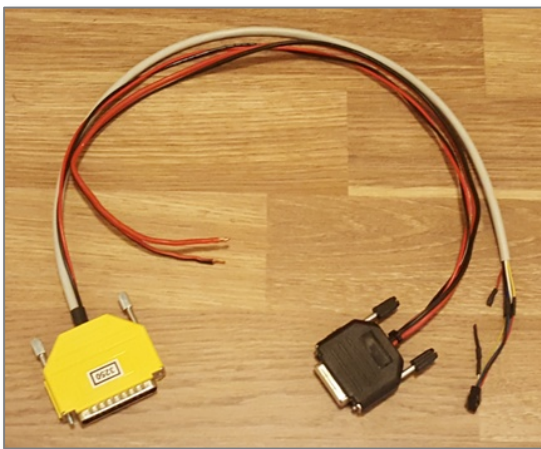

Cable Kit 3250

Connections




Connection at the back of the control head



Fully connected kit

Programming tips

To get a fixed audio level out of the radio to the interface. Set all volumes to 0dB.

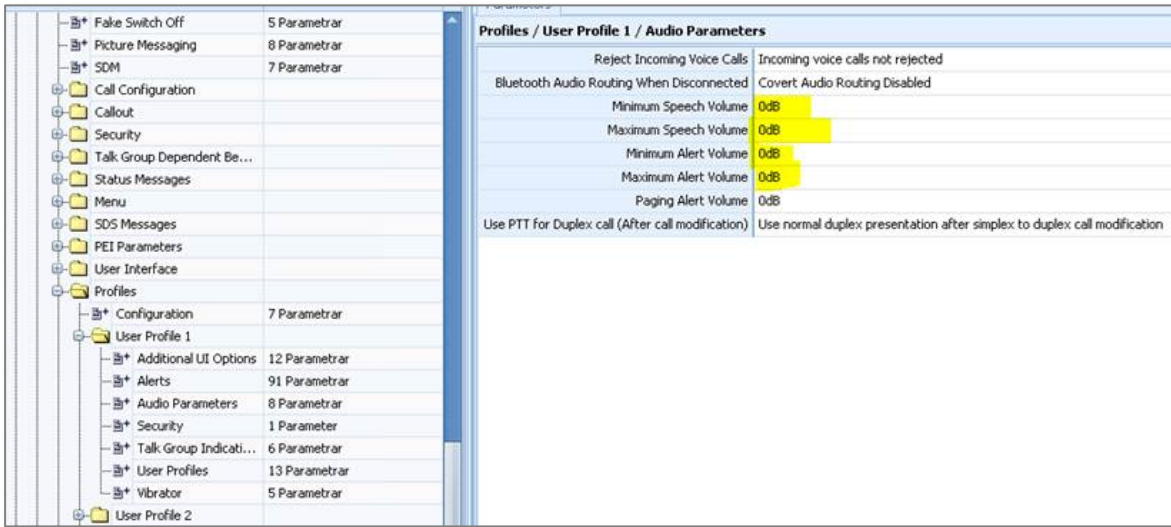

To make sure that the audio is not muted when the knob is in zero position. Disable the "Mute speech..." function.

