

## Phone modem kit 3048/02

**Phone modem: Maestro 100 3G**  
**Cable Kit: 3091**

### Remote functionality

This kit will together with the Network Interface 3009/39 let the Mimer SoftRadio operator(s) answer and make calls from GSM/3G networks.

### Installing the SIM-Card

Use a ball pen or paper clip to eject the SIM holder by pressing the eject button. Put the SIM card to the tray; make sure it is completely inserted in the tray, then carefully put back the tray into the slot.



### Connecting the antenna

Connect an antenna with SMA male connector on the modem, make sure the antenna is tightly secured. Select an antenna with the right GSM frequency and an impedance of 50Ω; incorrect antenna will affect communication and even damage the modem.

### Connecting to the Network Interface


Use the supplied cable kit to connect the modem to the Network Interface. Connect the power cable on the cable kit to the modems power connector.

### Power supply

Connect the red/black cables to a power source. Typically 12VDC, 1A. Red is positive and black is negative.

### Status indication LED

- OFF: modem is switched off
- ON: modem is connecting to the network
- Flashing slowly: modem is in idle mode
- Flashing rapidly: modem is in transmission/communication

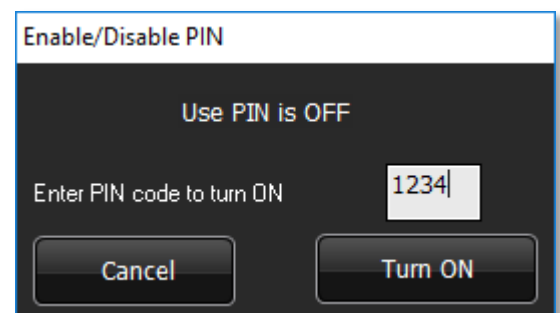

PIN code menu