

Cable Kit 3092 Interface 3009/62

Mimer SoftRadio – Sailor 6300-series MF/HF-radio

Remote functionality

This cable kit will together with the Mimer Network Interface give remote control of the radio's audio and PTT functions.

Mimer SoftRadio will also show a full Virtual Control Head, resembling the radios front panel. All the radios functions are available from there.

Radio programming

No special programming is needed in the radio.

The volume control on the radio front panel does not change the audio to the interface, so it can be turned all the way down.

Cable Kit

Important! The red and black wires shall be connected to **12VDC**, red is positive. (Although the radio uses 24V)

The network interface consumes max 0,3A.

For the remote-control function, the radio (not the control head) also needs to be connected to the same LAN as the network interface, through a standard LAN cable. See next pages.




Cable Kit Sailor



Connectors on the Control Panel


- Connect the interface cable in the ACC connector

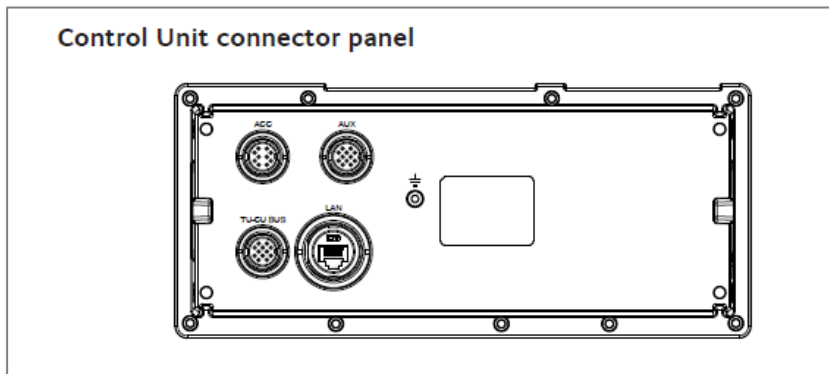

Picture from Sailor Installation Manual

Connectors on the Radio Unit

- Connect a standard LAN cable in the LAN connector

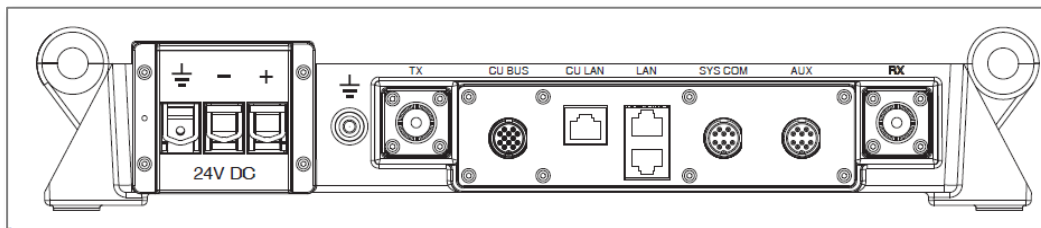

Picture from Sailor Installation Manual


LAN setup

The remote control of the radios functions is done through an IP connection. Therefore the radios IP address needs to be setup in the Network Interface.

Radio IP address

If the radio is connected to a LAN with DHCP functionality, it will receive an IP address from the network.


Check the radios IP address through the menus on the radio. In the menu SETUP / SYSTEM SETUP, scroll down to the bottom and read Radio Info / IP.

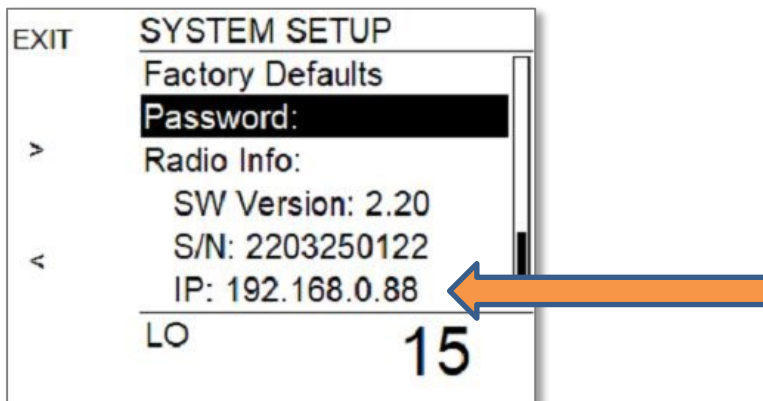

TIP: When using the LAN DHCP, it is recommended to make the address fixed in the LAN router, so that it will not change at a later point in time.

Setting in the Network Interface


Set the radios IP address in the program "Mimer Interface Setup". See picture below.

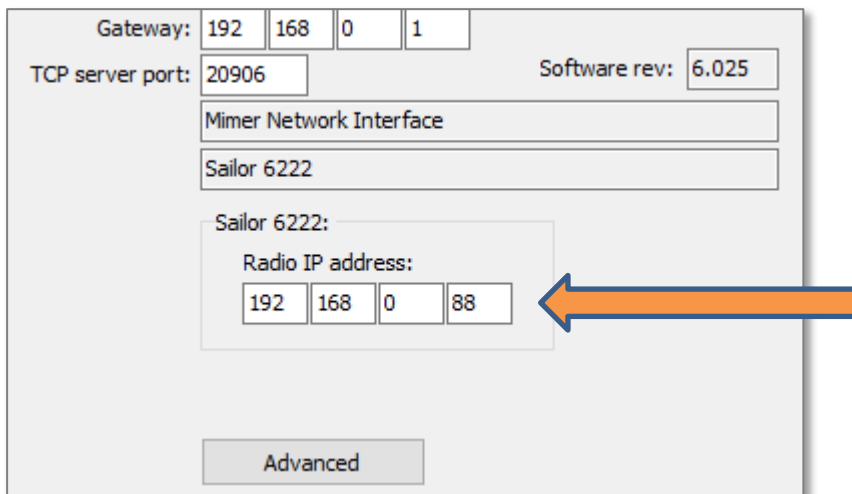

Picture shows settings for a Sailor 6222, it is the same for 6300


Display setup

The display theme can be set in the radios menus. The selection will follow into SoftRadio. This is done in the menu SETUP / SYSTEM SETUP. Se picture below.

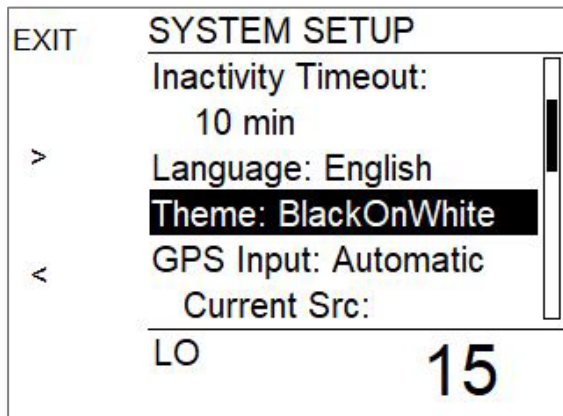


*Displays with "Black onWhite" and "WhiteonBlack"
(The right picture is from the VHF radio, 6222)*

Virtual Control Head Functions

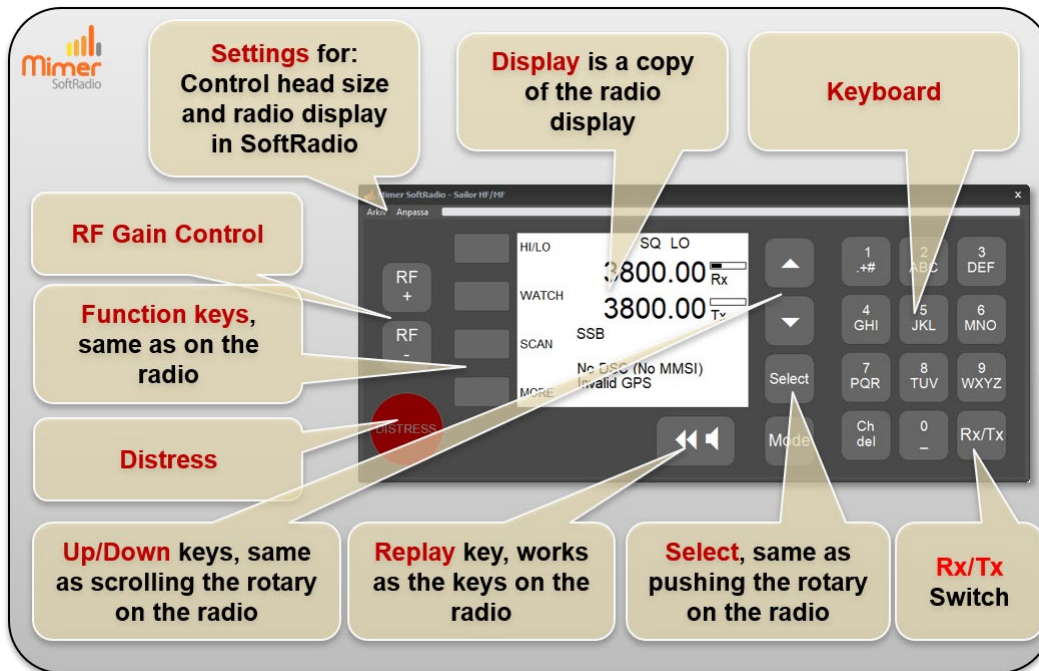

Distress

When pushing the Distress key, you will get a dialogue box, as below. This double function is the equivalent of the lid over the physical key on the radio.

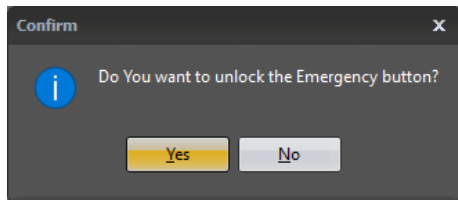

Blocking

Note: In about 8 seconds after a transmit at any SoftRadio operator, the radio is locked for any changes. This is indicated by a grey screen on the Virtual Control Head. A new PTT can be made, but no channel change or other function.

Also, if someone is using the physical front panel of the radio, settings will be blocked in SoftRadio for a while.

