

## Cable Kit 3274 Interface 3009/09 or 3130

Icom IC-F5400-Series radios

### Remote functionality

This cable kit will together with the Mimer Network Interface give remote control of the radios audio and PTT functions.

### Radio programming

The PTT input port needs to be selected and a fixed volume needs to be set.

See the following pages for details.


### Cable Kit

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.

**Please note** that the black connector marked "Radio" shall be connected to the radio and the yellow connector marked "3274" shall be connected to the network interface.

Connect the 3,5mm audio connector to the radios external speaker output.

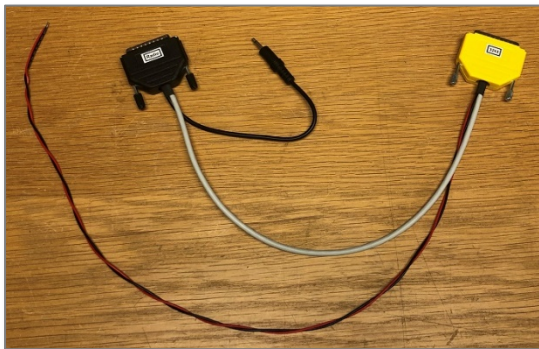


*Cable Kit 3274*

## Radio Settings

### Audio

Set both the Min and Max Audio Level to 15. This will force the external audio to have a fixed volume level that is accepted by the Network Interface.

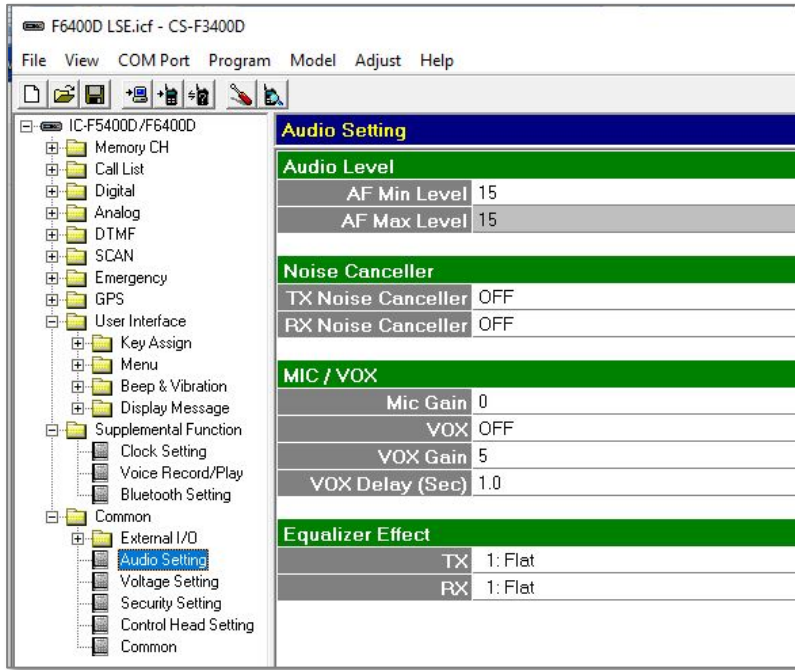

### PTT

Set the Ext I/O 19 to EPTT active Low.

