

Cable Kit 3021/02 Interface 3130 or 3009/17

Mimer SoftRadio - Motorola CM&GM-series (16 pin) without virtual control head

Remote functionality

This cable kit will together with the Mimer Network Interface gives remote control of the radios audio and PTT functions.

Virtual Control Head is not possible.


Radio programming

- GPIO Pin 3 shall be programmed for "Voice PTT, active low"
- Enable accessory connector mic
- Select Rx Audio as "Filtered Squelched"
- Enable Ignition Sense

Power

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.

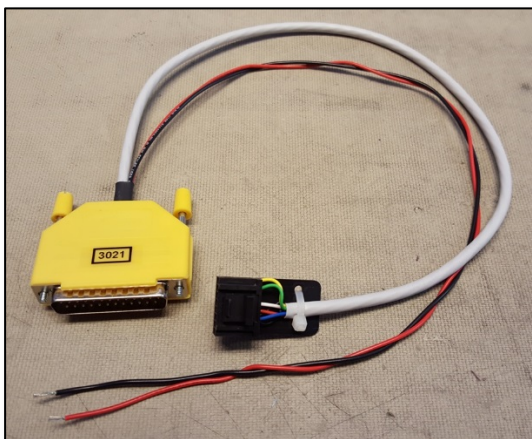

Cable Kit CM&GM-series