

## Cable Kit 3179

### Interface 3009/45 - Airband

### Interface 3009/37 - Marine

## Mimer SoftRadio – Jotron TR-7750 / TR-7750C

### Remote functionality

This cable kit will together with the Mimer Network Interface give remote control of the radios audio and PTT functions.



It will also present a virtual control head, to the operator, with remote control of channel change and squelch settings.



### Radio programming

The interface is pre-set for the following radio default settings:

Rx Config/Audio/Line Output Level/0.0dBm

Tx Config/Audio/Input Source/Auto

Tx Config/Audio/Line Sensitivity/-10dBm

Tx Config/Keying/Source/Txgnd

See screen shots on next page.

### Power Supply

The interface is powered, through the cable kit, from the Tx-module.

### Connection

The three cables are marked where they shall be connected.

On some radios the Tx REM port is occupied with a cable from the PSU (REM2). You can then connect the cable marked Tx REM to the PSU (REM1) instead.



*Cable Kit 3179*




*Interface mounting  
with bracket 3106*


## Settings Screen shots



Virtual Control Head functions

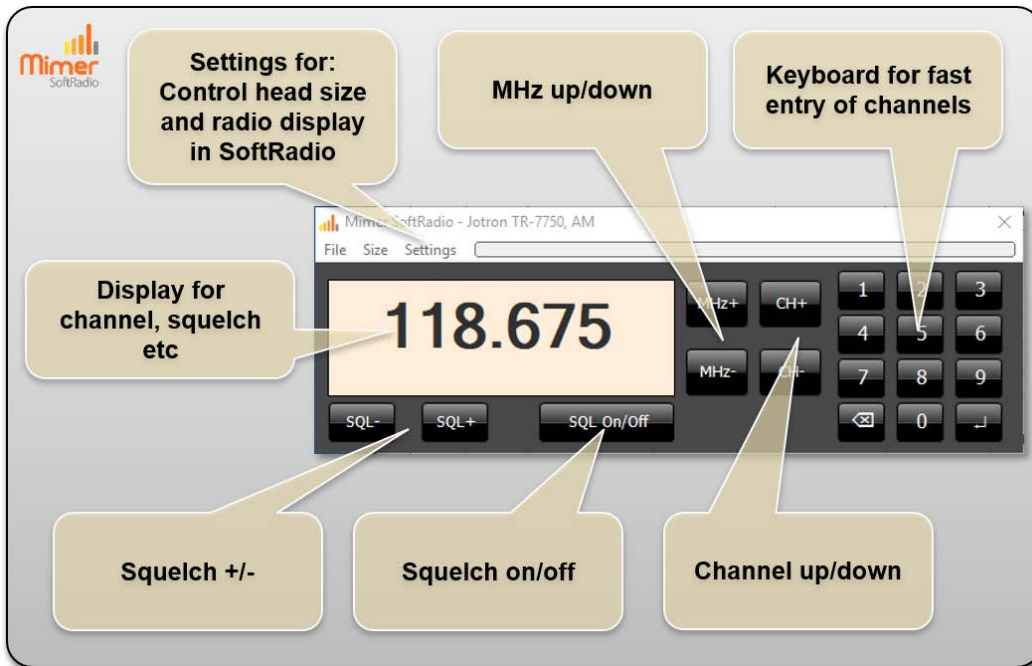

*Airband version with MHz and fine tune keys*

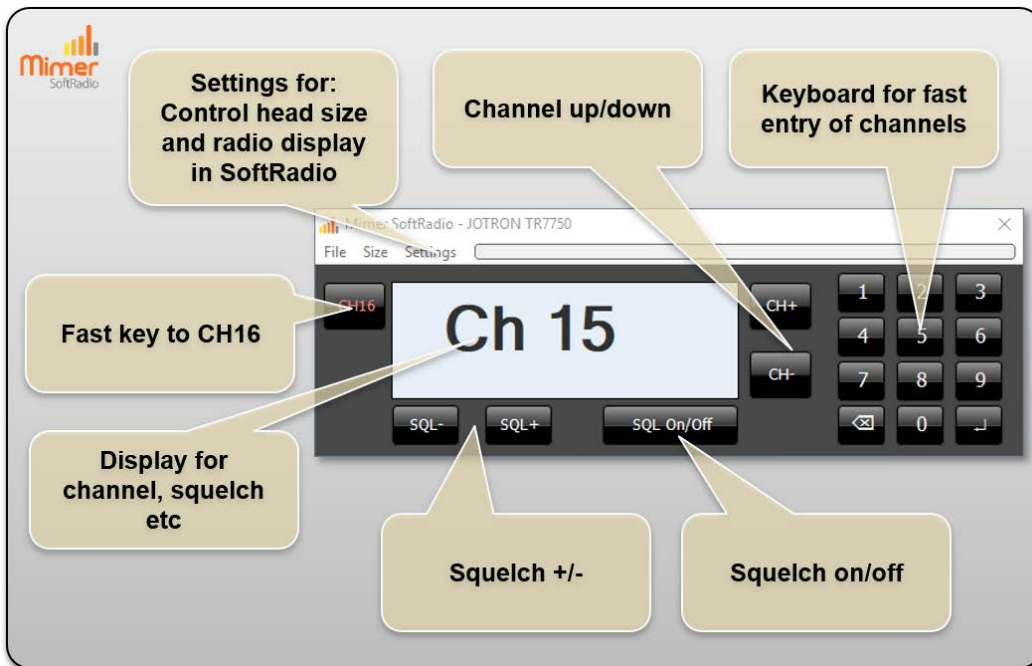

*Marine version with fast key to CH16.*