

X-Link Cable kit 3517

**Connect a Kenwood NX5200
to Mimer X-Link MK2**

Also refer to the X-Link setup manual.

Interface Power Supply

12VDC / max 0,3A.

Power connection through separate cable delivered with the interface. Red is positive.

Radio programming

No special programming in the radio is necessary.

Connecting the radio

The radio is connected through the side system connector.

Volume setting

The volume of the portable shall be set to "half" volume.




Byt bild

Settings in the X-Link interface

Select the proper settings for Radio A or Radio B depending on your connection.

- Radio with AF level sense for Rx detect.
 - Set the detect level etc.
- Details can be found in the setup manual.

The levels in the picture are our recommendations. You might find that your radio needs adjustments.

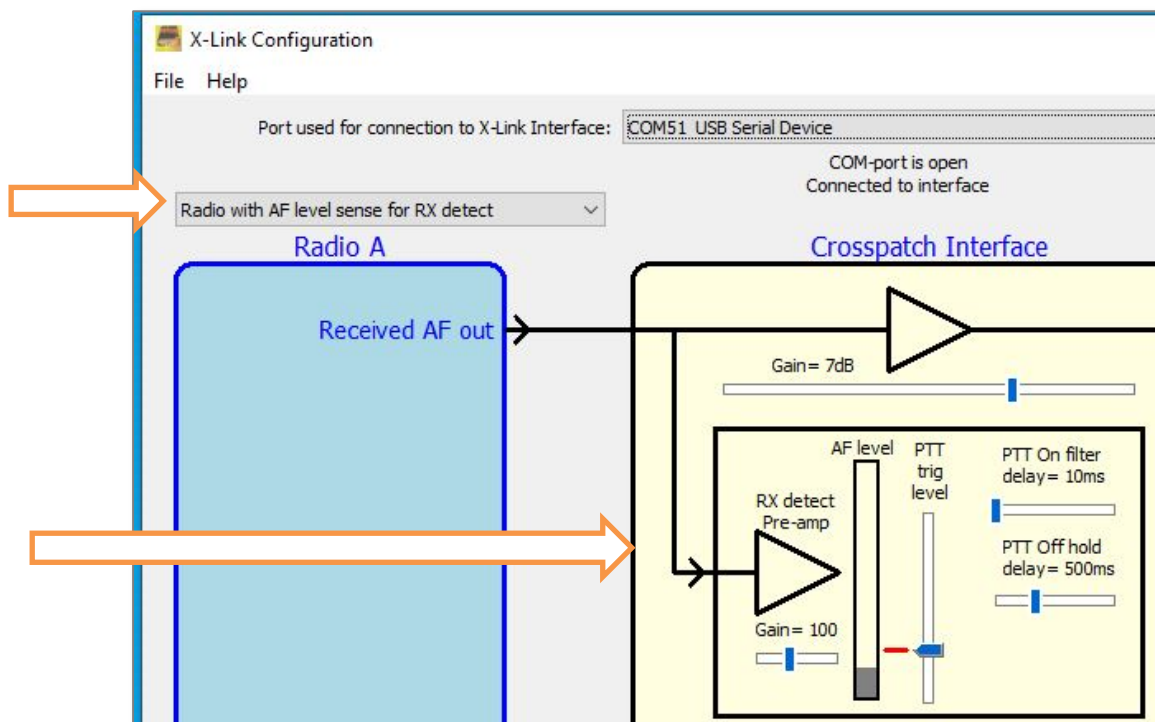

Part of the Configuration software window

Check/adjust the audio levels in both directions in the interface so that the users can hear the X-Link with the same level as when listening to other radios.

See the X-Link setup manual for details on setting the audio level.